



## Model : SILVER

### Features

- ▶▶ Aluminum Good Locking Die Cast Body
- ▶▶ Light Weight & Compact Design
- ▶▶ Highly Efficient

### Technical Specification

Model	SILVER
Size	1/2"
Flow Rate of SCFM	40
Efficiency	99.99%
Working Pressure	0 - 10 Kg/cm <sup>2</sup>
Testing Pressure	12 Kg/cm <sup>2</sup>
Service Life	3 - 5 Years ( Approx. )
Maintenance	No maintenance required
Spares	No Spare required
Media	Compressed Air
Installation Preferred	At the end, before FRL in each Equipment / Instrument
Minimum Distance Required	6 mtrs. after Air Compressor / Air Receiver Tank
Moisture Drainage	Manual, Mechanical or Electrical Drainage System to be installed
Weight	0.900

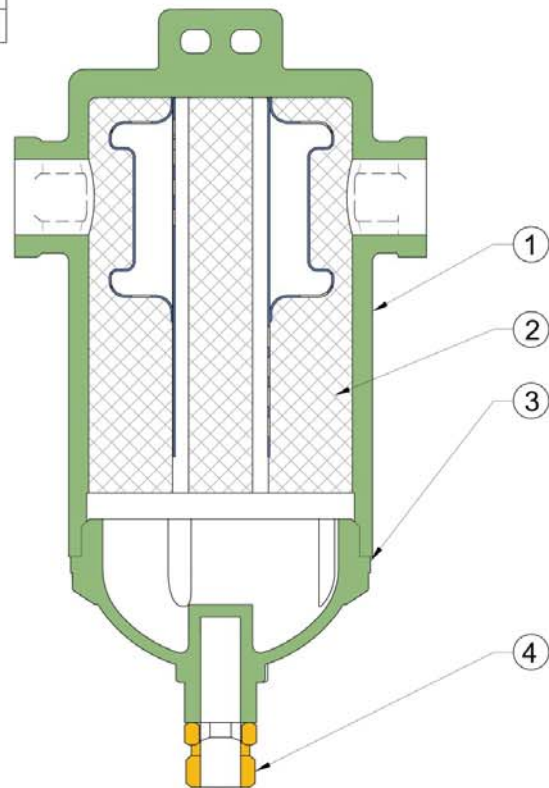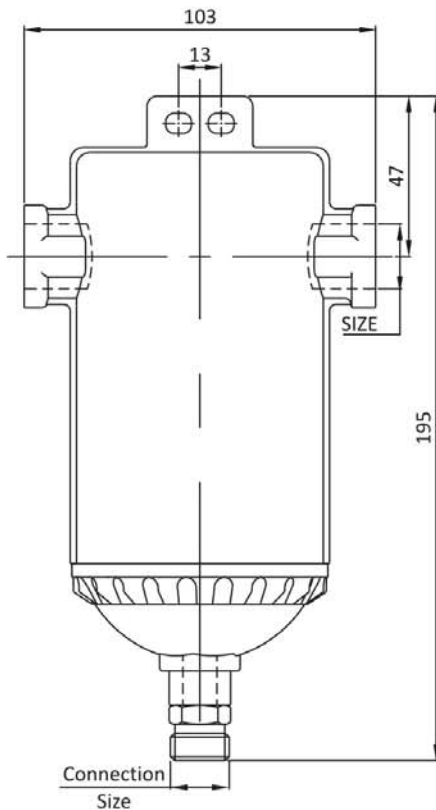

No.	Part Name	Material
1	Body	Aluminum Pressure Die Cast
2	Cartridge	Imported S. S.
3	Bottom Cover	Aluminum Pressure Die Cast
4	Adapter	Brass